




PL-11 Bending Wave Audio Loudspeaker

2-way system with one DML (distributed mode loudspeaker) and one HF ribbon

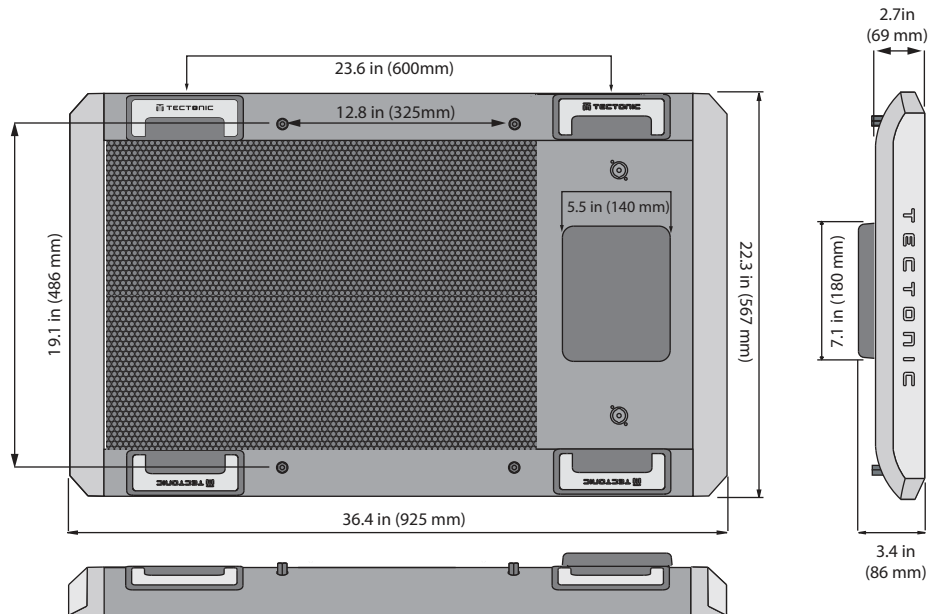

PL-11 SPECIFICATIONS:

- Frequency Response:
 - 90Hz – 20kHz (+-3dB)
 - 70Hz – 22kHz (+3dB/-10dB)
- Amplification:
 - Continuous Power Rating: 200W RMS (DML), 60W RMS (Ribbon)
 - Program Power / Peak Power: 300W/400W (DML), 120W/240W (Ribbon)
 - Recommended Amplification: 400W @ 8 ohm (DML), 240W@ 12 ohm (Ribbon)
- Neutrik NL4FC four-conductor connectors
- Sensitivity: 97dB (DML), 103dB (ribbon) @ 1W / 1Meter
- Peak Output: 126dB
- Nominal Impedances:
 - 1 x DML, 8 ohm
 - 1 x Ribbon, 12 ohm
- Coverage:
 - Horizontal: 165° (DML), 120° (ribbon)
 - Vertical: 165° (DML), 15° (ribbon)
- Dimensions: 36.4" W x 22.3" H x 2.9" D (925mm W x 567mm H x 74mm D)
- Weight: 68 lbs (31 Kg)

Specifications subject to change without notification.