



## PL-11 Sock Mounting

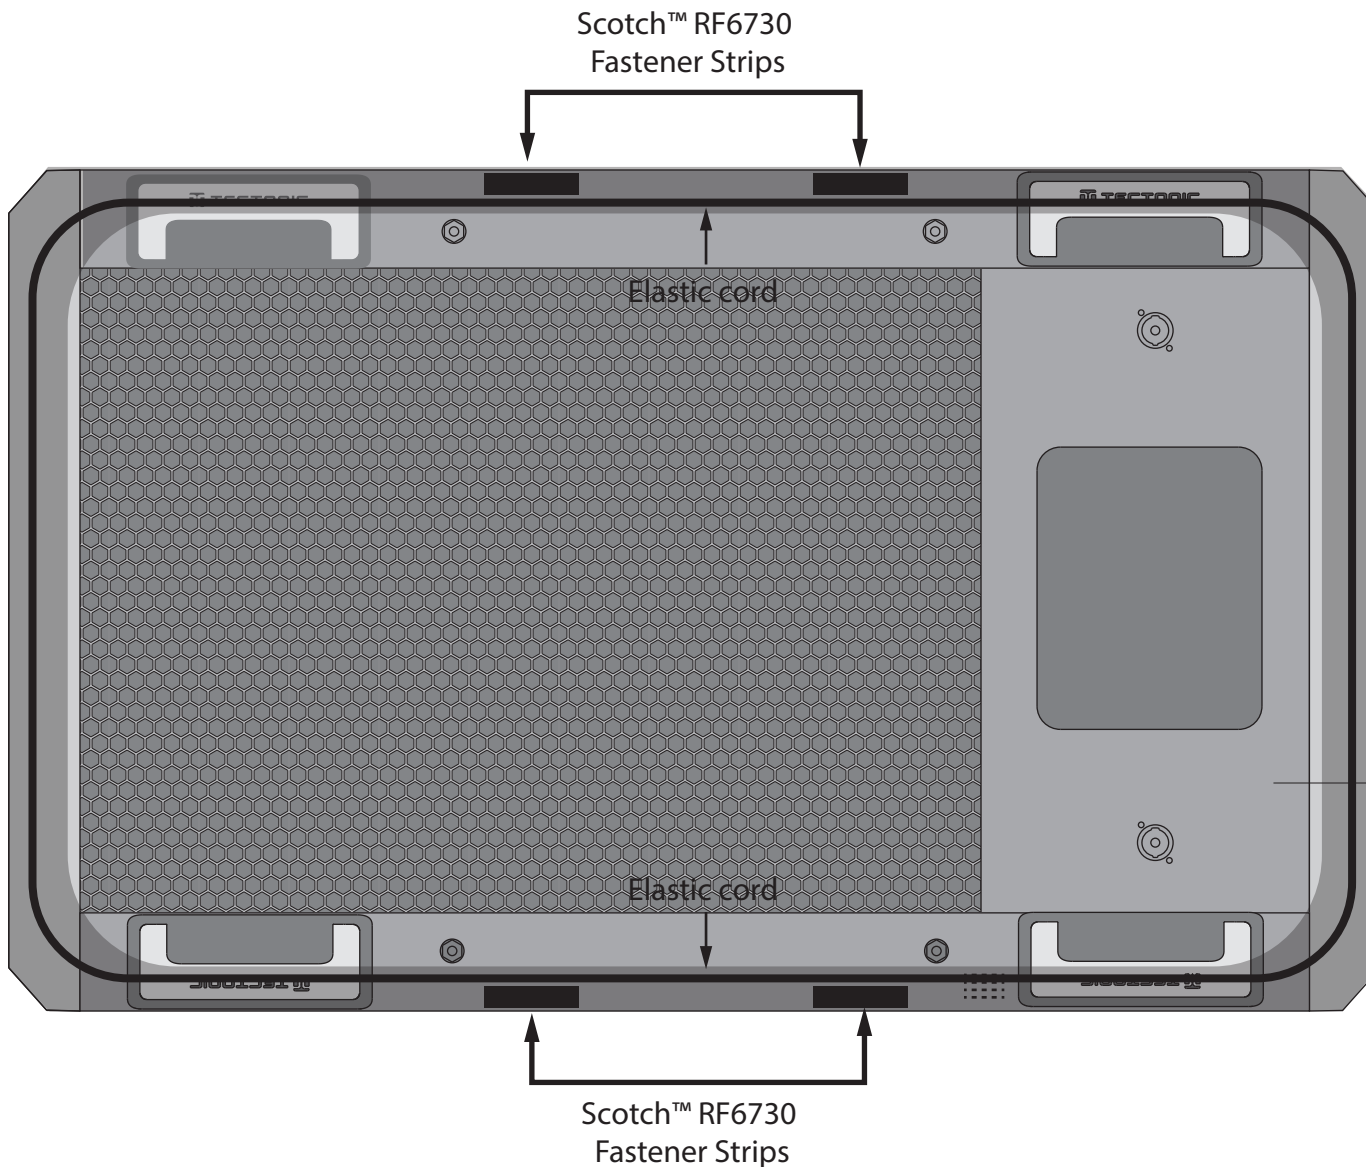

### Directions

- Place sock on speaker panel and pull tight.
- Make sure sock is centered on panel.
- Cut Scotch 1" x 3" fastener strips in half to 1" x 1.5".
- Stick mating pieces together and press until they 'click'.



- Remove backing from the sock side of the fastener and press into fabric at the locations shown.
- Remove the backing from the panel side of the fastener.
- Stretch the sock tightly over the panel and press the fastener firmly to the panel.
- Repeat for all locations.



## PL-12 Sock Mounting

